

**PHONO**

# 575-595w

## Draco Module Series

N-TOPCON HIGH EFFICIENCY 144-16BB-W-WG

**Bloomberg**  
NEW ENERGY FINANCE

**Tier1**



### Extraordinary Product Performance


- Up to 30% additional power yield benefited from bifacial technology and up over 80% cell bifaciality
- Competitive high-temperature performance with ameliorated temperature coefficient
- Better weak illumination response, higher power generation with N-TOPCon technology

### Higher Quality Reliability

- N-type with lower LID and LeTID
- Industry-leading cell processing technology and dual glass contributes to excellent anti-PID characteristic
- First-year degradation is less than 1.0%, with linear degradation of 0.4% per year for 30 years

### Wider Application Conditions

- BIPV, vertical installation, snowfield, high-humid area, windy and dusty area
- Safer and easier handling during transportation and installation

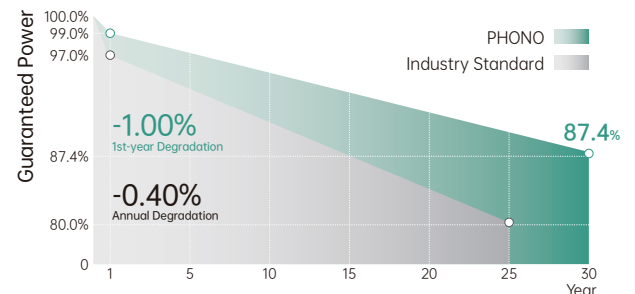

**15-year**  
Product Warranty

**30-year**  
Linear Performance Warranty

### MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001  
2015 / Quality management system

ISO 14001  
2015 / Standards for environmental management system

ISO 45001  
2018 / International standards for occupational health & safety



Model	1000V	PS575M8GF-24/TNH		PS580M8GF-24/TNH		PS585M8GF-24/TNH		PS590M8GF-24/TNH		PS595M8GF-24/TNH	
	1500V	PS575M8GFH-24/TNH		PS580M8GFH-24/TNH		PS585M8GFH-24/TNH		PS590M8GFH-24/TNH		PS595M8GFH-24/TNH	
Testing Condition		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (Pmpp)		575	440	580	444	585	448	590	452	595	456
Rated Current (Imp)		13.36	10.76	13.42	10.81	13.48	10.86	13.54	10.91	13.60	10.95
Rated Voltage (Vmpp)		43.04	40.92	43.22	41.09	43.40	41.26	43.58	41.43	43.75	41.59
Short Circuit Current (Isc)		14.04	11.31	14.11	11.36	14.18	11.42	14.25	11.48	14.32	11.53
Open Circuit Voltage (Voc)		51.97	49.76	52.20	49.98	52.44	50.21	52.68	50.44	52.92	50.67
Module Efficiency (%)		22.26		22.45		22.65		22.84		23.03	

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C , Spectra at AM1.5, Wind at 1m/s

Maximum Power (Pmax)	633	639	644	650	655
Optimum Operating Current (Impp)	14.71	14.97	14.84	14.92	14.98
Optimum Operating Voltage (Vmpp)	43.04	43.22	43.40	43.58	43.75
Short Circuit Current (Isc)	15.49	15.58	15.62	15.70	15.75
Open Circuit Voltage (Voc)	51.97	52.20	52.44	52.68	52.92

Cell Type	N Type Monocrystalline
Dimension (L × W × H)	Length: 2278mm (89.69 inch) Width: 1134mm (44.65 inch) Height: 30mm (1.18 inch)
Weight	32.0kg (70.55 lbs)
Glass	2.0mm/2.0mm Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm² (IEC), (+): 350mm,(-): 250mm or Customized Length
Junction Box	IP 68 Rated

Voltage Temperature Coefficient	-0.25%/°C
Current Temperature Coefficient	+0.04%/°C
Power Temperature Coefficient	-0.29%/°C
Power Tolerance	0~+3%
NOCT	42±2°C
Bifaciality	80±5%

Operating Temperature	From -40 to + 85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	30A
PV Module Classification	II
Fire Rating (IEC61730)	C
Maximum System Voltage	DC 1000V/1500V

Container	20' GP	40' HQ
Pieces/Container	180	720
Pcs/Pallet	36	36
Pallets/Container	5	20

Cell temp. = 25°C

- Incident Irrad. = 1000W/m<sup>2</sup> (Green line)
- Incident Irrad. = 800W/m<sup>2</sup> (Black line)
- Incident Irrad. = 600W/m<sup>2</sup> (Blue line)
- Incident Irrad. = 400W/m<sup>2</sup> (Light Green line)
- Incident Irrad. = 200W/m<sup>2</sup> (Grey line)

The graph shows the power output of the solar cell as a function of voltage for different incident irradiances. The power increases with voltage up to a maximum and then decreases. Higher irradiances result in higher maximum power and higher open-circuit voltages.

